

# bc637PCle


## GPS Synchronized, PCI Express Time and Frequency Processor

### Features

- GPS synchronized with 170 ns RMS accuracy to UTC
- IRIG A, B, G, E, IEEE 1344, NASA 36, XR3, and 2137 time code inputs and outputs
- Simultaneous AM and DCLS time code inputs and outputs
- 100 ns clock resolution for time requests
- Programmable  $<<1$ PPS to 100MPPS DDS rate synthesizer output/interrupt
- 1, 5, or 10MPPS rate generator output
- 1PPS and 10 MHz inputs
- Three (3) external event time capture/interrupts
- Programmable time compare output/interrupt
- Zero latency time reads
- Battery backed real-time clock (RTC)
- Low-profile PCIe form factor
- Linux, Solaris, and Windows software drivers/SDKs included
- Superior user interface and documentation
- Optional OCXO upgrade

### Benefits

- Precise sub-microsecond time available to host computer applications
- Easy integration facilitated by included Windows, Linux, and Solaris SDKs and drivers
- Extremely fast time reads
- Programmable time and frequency functions to quickly customize for specific applications
- Wide variety of time codes facilitate easy integration with existing systems
- Dedicated and responsive technical support to assist in PCIe card integration
- Well documented for easy and fast system integration

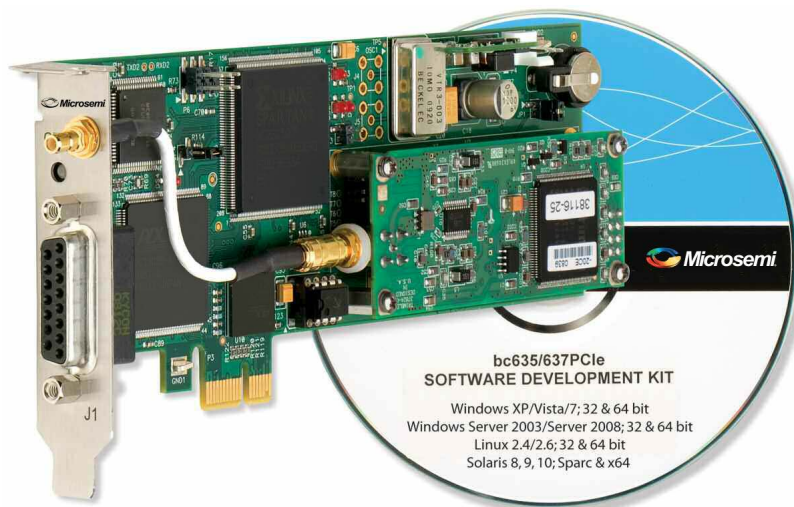

The Microsemi GPS referenced bc637PCle timing module provides unparalleled precise time and frequency functions to the host computer and peripheral systems. Precise time is acquired from the GPS satellite system or from time code signals. GPS synchronization provides 170 ns RMS accurate time to UTC (USNO) enabling the bc637PCle to precisely synchronize multiple computers to UTC. Integration into a custom application is easy and very efficient through the use of the full-featured Windows, Linux and Solaris SDKs/drivers included standard with the module.

Extensive time code generation and translation are both supported. The translator reads and disciplines the internal oscillator to either the amplitude modulated (AM) and DC level shift (DCLS) formats of IRIG A, B, G, E, IEEE 1344, NASA 36, XR3 or 2137 time codes. The generator outputs either IRIG A, B, G, E, IEEE 1344, NASA 36, XR3 or 2137 in both AM and/or DCLS formats.

Central to the operation of the module is a disciplined 10 MHz oscillator that is either a TCXO or optional OCXO that provides the timing module's 100-ns

clock. Current time (days to 100 ns) can be accessed across the PCIe bus with no PCIe bus wait states, which allows for very high speed, low latency time requests. The 10 MHz oscillator drives the module's frequency and time code generator circuitry. If the input reference is lost, the module will maintain time (flywheel) based on the 10 MHz oscillator's drift rate. The optional OCXO oscillator improves flywheel drift performance over the standard TCXO. If power is lost, a battery backed real-time clock (RTC) maintains the time.

The module has a state of the art DDS rate synthesizer with a range from 0.0000001PPS to 100MPPS. The module may also be programmed to generate an interrupt at a precise predetermined time based on a time compare (strobe). Three Event Time Capture inputs provide a means of latching time of different external events.

A key feature of the bc637PCle is the ability to generate interrupts on the PCIe bus at programmable rates. These interrupts can be used to synchronize applications on the host computer as well as signal specific timing events over the bus.

# bc637PCle

## GPS Synchronized, PCI Express Time and Frequency Processor

The unique external frequency input allows the time and frequency of the bc637PCle to be derived from an external oscillator that may also be disciplined (DAC voltage controlled) based on the selected input reference. The module may be operated in generator (undisciplined) mode where an external 10 MHz from a Cesium (undisciplined) mode where an external 10 MHz from a Cesium or Rubidium standard is used as the frequency reference. This

creates an extremely stable PCIe-based clock for all bc637PCle timing functions.

Integration of the module is easily facilitated with the included SDKs/drivers for 32/64-bit Windows and Linux, and 64-bit Solaris.


### Precision Time and Frequency in the PCIe Form Factor

#### Inputs

- GPS
- AM time codes
- DCLS time codes
- External events (3x)
- 10 MHz
- 1PPS

#### Outputs

- AM time codes
- DCLS time codes
- Programmable alarm (strobe/time compare)
- <<1PPS to 100MPPS rates
- 1PPS
- 1, 5, or 10MPPS
- Oscillator control voltage

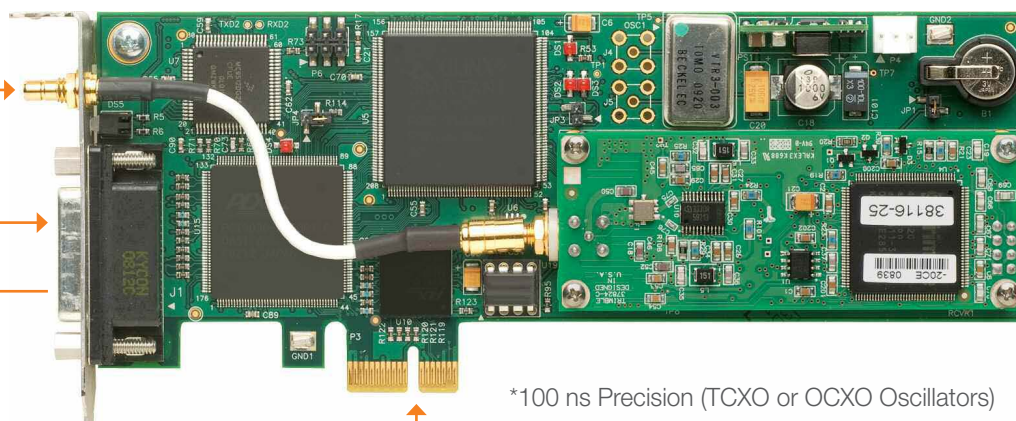

#### Over the PCIe Bus

- Precise time
- Event interrupts
- Alarm interrupts (time compare/strobe)
- Programmable interrupt rates
- Configuration and control

### Reading the Precise Time

The bc637PCle provides precise time on request and extremely fast response to host applications. This request for time is made using the included SDK software functions. Time can be provided in binary or decimal form.

### A Multitude of Time Codes

The bc637PCle has the widest time code input and output support available in any bus level timing card. Support is available for 30 different time codes, including IRIG A, B, G, E, IEEE 1344, NASA 36, XR3, and 2137 in AM and DCLS formats.

### Measure External or Internal Events

Measure the exact time up to the occurrence of three independent external events. Bus interrupts instantly notify the CPU that the measurements are made and waiting. Similarly, host application-generated interrupts to the bc637PCle card over the bus can be precisely timestamped for precise host application-based processes.

### Flexible Rate Generation

The direct digital synthesizer on the bc637PCle can be programmed to generate rates up to 100MPPS or as little as once every 115 days. These rates are available as timing signal outputs or as interrupts on the bus. The rate adjustment resolution is as small as 1/32 Hz.

# bc637PCle

## GPS Synchronized, PCI Express Time and Frequency Processor

### Frequency Outputs

Precise clocks are excellent sources of frequency outputs. The bc637PCle offers 1, 5 or 10MPPS outputs directly from the steered internal oscillator of the clock.

### External Frequency Inputs and DAC Control

The external frequency input is a unique feature that allows the time and frequency of the bc637PCle to be derived from an external oscillator such as a 10 MHz Cesium or Rubidium standard. This creates an extremely stable PCIe-based clock for all bc637PCle timing functions. For closed loop control, an external oscillator may be disciplined using DAC voltage control output from the bc637PCle.

### Time Compare/Strobe/Alarm

A useful feature of any precise clock is the ability to notify when a particular time is reached (like an alarm clock). When the preset time precisely matches the actual time, an external signal and an interrupt to the bus are instantly generated, signaling an application that point in time has just occurred.

### Over the Bus Features

Beside from precise timestamps, the bc637PCle can provide very precisely timed interrupts on the bus at fixed rates, predetermined times, or to signal an event has occurred on the card. These interrupts can be integrated into user applications requiring more deterministic behavior or application synchronization with other computers. Similarly, user applications can use interrupts as markers in time and later retrieve exactly when the interrupt occurred.

### Configuration and Control

The bc637PCle includes easy-to-use programs to easily configure the card and validate operations. This software is also included with the SDKs and driver software.

## PCIe Card Integration Made Easy With Included SDKs and Drivers

### Windows, Linux, and Solaris SDKs Speed PCIe Integration

The PCIe card includes standard full-featured software development kits, and speed the integration of Microsemi PCIe cards into any application.


Using an SDK is an easy-to-integrate and highly reliable alternative to writing lower-level code to address a card's memory registers directly with just a driver. The function calls, and device drivers in the SDKs make inter-facing to a Microsemi PCIe card straight forward and help keep the software development focused on the end application.

### SDKs Save Time and Money

Programmers find the SDK an invaluable resource in accelerating the integration of Microsemi PCIe cards into applications, saving both time and money. The SDK functions address each Microsemi PCIe timing card feature, and the function names and parameters provide insight into the capability of each function. By using the SDK, one can leverage Microsemi's timing expertise and confidently integrate a Microsemi PCIe card into your application.

### License Free

Distribution of embedded Microsemi software in customer applications is royalty free.

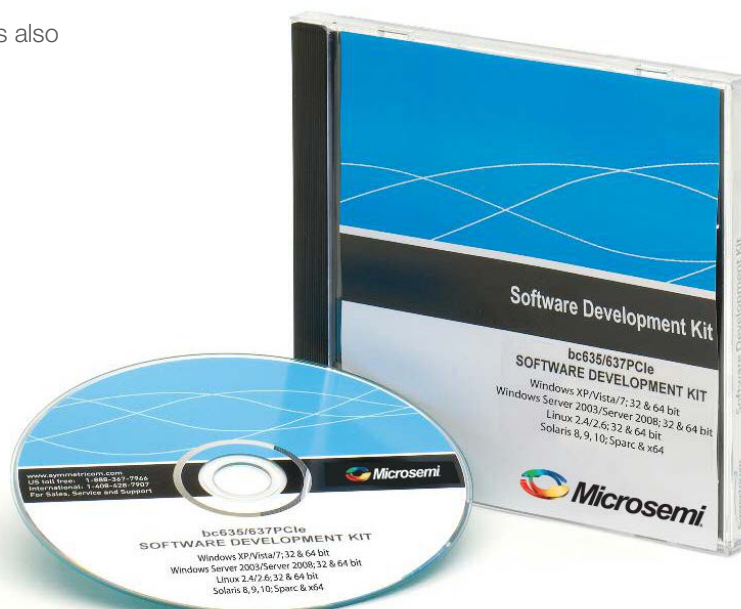

# bc637PCle

## GPS Synchronized, PCI Express Time and Frequency Processor

### Driver Comparison

Windows SDK and Driver	Linux SDK and Driver	Solaris SDK and Driver
<ul style="list-style-type: none"> <li>Windows XP/Vista/7</li> <li>Windows Server 2003/2008</li> <li>32- and 64-bit support</li> <li>Kernel mode driver</li> <li>Code examples</li> <li>Test application program</li> <li>Complete documentation</li> <li>Timekeeping utility program</li> </ul> <p>The Windows SDK for bc637PCle cards include a Windows XP/Vista/Server/7 kernel mode device driver for the 32- and 64-bit PCIe interface. The SDK includes .h, .lib, and DLL files to support both 32- and 64-bit application development.</p> <p>The target programming environment is Microsoft Visual Studio (Microsoft Visual C++ V6.0 or higher). Both Visual C++ 6.0 and Visual Studio 2008 project files are supplied with the source code.</p> <p>Also included is Microsemi's bc637PClcfg application program that can be used to ensure proper operation of the PCIe card, and the TrayTime application that allows the user to update the system clock in which the card is installed. Source code for these programs and smaller example programs are included.</p>	<ul style="list-style-type: none"> <li>Up to Linux Kernel 4.6</li> <li>32- and 64-bit kernel support</li> <li>Code examples</li> <li>Test application program</li> <li>Complete documentation</li> </ul> <p>The Linux SDK for bc637PCle cards includes PCIe kernel mode device drivers for both 32-bit and 64-bit kernels, an interface library accessing all bc637PCle features, and example programs with the source code.</p> <p>The target programming environment is the GNU compiler collection (GCC) and the C/C++ programming languages.</p> <p>Also included is Microsemi's bc63xPClcfg application program, which ensures proper operation of the PCIe card in the host computer. The example program includes sample code, exercising the interface library, and conversion examples of the ASCII format data objects passed to and from the device into a binary format suitable for operation and conversion. The example program is developed using discrete functions for each operation, allowing the developer to copy any useful code and use it in their own applications.</p>	<ul style="list-style-type: none"> <li>Solaris kernel mode driver</li> <li>64-bit Solaris 8-10</li> <li>Code examples</li> <li>Test application program</li> <li>Complete documentation</li> </ul> <p>Microsemi's Solaris SDK includes bc63xPClcfg, an application program to ensure proper operation of the PCIe card in the host computer. The example program includes sample code and conversion examples of the ASCII format data objects passed to and from the device into a binary format suitable for operation and conversion.</p> <p>The target programming environment is the Solaris application development tool chain and the C/C++ programming languages.</p> <p>The Solaris SDK includes the Solaris device driver source code. Applications access the features of the hardware through the standard 'ioctl' Solaris system function. The ioctl codes are defined for all the features of the card. The bc63xPClcfg program shows how to use most ioctl codes. Developers can copy any useful code from the bc63xPClcfg source code and use it in their own applications.</p>
<b>Minimum System Requirements</b> <b>Operating System</b> <ul style="list-style-type: none"> <li>Windows XP/Vista/7</li> <li>Windows server 2003/2008</li> </ul> <b>Hardware</b> <p>PC-compatible system with a Pentium or faster processor</p> <b>Memory</b> <p>24 MB</p> <b>Development Environment</b> <p>Microsoft Visual Studio (Visual C++) 6 or higher</p>	<b>Minimum System Requirements</b> <b>Operating System</b> <p>Linux Kernels 2.4, 2.6</p> <b>Hardware</b> <p>x86 processor</p> <b>Memory</b> <p>32 MB</p> <b>Development Environment</b> <p>GNU GCC recommended</p>	<b>Minimum System Requirements</b> <b>Operating System</b> <p>Solaris versions 8, 9, and 10</p> <b>Hardware</b> <p>SPARC and x86_64</p> <b>Memory</b> <p>32 MB</p> <b>Development Environment</b> <p>Solaris compilers</p>



# bc637PCle

## GPS Synchronized, PCI Express Time and Frequency Processor

### SDK Function Reference List

#### Windows and Linux

#### SDK Function Reference List (Partial)\*

#### Basic Time and Frequency Processor (TFP) Functions

- bcStartPCI/bcStopPCI Opens/closes underlying device layer.
- bcStartInt/bcStopInt Starts/stops the interrupt thread to signal interrupts.
- bcSetInt/bcReqInt Enables/returns enabled interrupt.
- bcShowInt Interrupt service routine.
- bcReadReg/bcWriteReg Returns/sets requested register contents.
- bcReadDPRReg/bcWriteDPRReg Returns/sets requested dual port RAM register contents.
- bcCommand Sends SW reset command to board.
- bcReadBinTime/bcSetBinTime Reads/sets TFP major time in binary format.
- bcReadDecTime/bcSetDecTime Reads/sets TFP major time in BCD format.
- bcReqTimeFormat Returns selected time format.
- bcSetTimeFormat Sets the major time format to binary or grouped decimal.
- bcReqYear/bcSetYear Returns/sets year value.
- bcSetYearAutoIncFlag Included for backward compatibility to the bc635/637PCI-U card.
- bcSetLocalOffsetFlag Enables or disables local time offset in conjunction with bcSetLocOff.
- bcSetLocOff Sets board to report time at an offset relative to UTC.
- bcSetLeapEvent Inserts or deletes leap second data (in non-GPS modes).
- bcSetMode Sets TFP operating mode.
- bcSetTcIn Sets time code format for time code decoding mode.
- bcSetTcInEx Sets time code and subtype for time code decoding mode.
- bcSetTcInMod Sets time code modulation for time code decoding mode.
- bcReqTimeData Returns selected time data from the board.
- bcReqTimeCodeData Returns selected time code data from the board.
- bcReqTimeCodeDataEx Returns selected time code and subtype data from the board.
- bcReqOtherData Returns selected data from the board.

- bcReqVerData Returns firmware version data from the board.
- bcReqSerialNumber Returns board serial number.
- bcReqHardwareFab Returns hardware fab part number.
- bcReqAssembly Returns assembly part number.
- bcReqModel Returns TFP model identification.
- bcReqTimeFormat Returns selected time format.
- bcReqRevisionID Returns board revision.

#### Event Functions

- bcReadEventTime Latches and returns TFP time caused by an external event
- bcReadEventTimeEx Latches and returns TFP time caused by an external event with 100 ns resolution.
- bcSetHbt Sets a user programmable periodic output.
- bcSetPropDelay Sets propagation delay compensation.
- bcSetStrobeTime Sets strobe function time.
- bcSetDDSFrequency Sets DDS output frequency.
- bcSetPeriodicDDSSelect Selects periodic or DDS output.
- bcSetPeriodicDDSEnable Enables or disables periodic or DDS output.
- bcSetDDSDivider Sets DDS divider value.
- bcSetDDSDividerSource Sets DDS divider source.
- bcSetDDSSyncMode Sets DDS synchronization mode.
- bcSetDDSMultiplier Sets DDS multiplier value.
- bcSetDDSPeriodValue Sets DDS period value.
- bcSetDDSTuningWord Sets DDS turning word value.

#### Oscillator Functions

- bcSetClkSrc Enables or disables on-board oscillator.
- bcSetDac Sets oscillator DAC value.
- bcSetGain Modifies on-board oscillator frequency control algorithm.
- bcReqOscData Returns TFP oscillator data.

#### Generator Mode Functions

- bcSetGenCode Sets time code generator format.
- bcSetGenCodeEx Sets time code and subtype generator format.
- bcSetGenOff Sets an offset to the on-board timecode generation function.

# bc637PCle

## GPS Synchronized, PCI Express Time and Frequency Processor

### GPS Mode Functions

- bcGPSReq/ bcGPSSnd Returns/sends a GPS receiver data packet.
- bcGPSMan Manually send and retrieve GPS receiver data packets.
- bcSetGPSOperMode Sets the GPS receiver to function in static or dynamic mode.
- bcSetGPSTmFmt Sets TFP to use GPS or UTC time base.

### Real-Time Clock (RTC) Functions

- bcSyncRtc Synchronizes RTC to current TFP time.
- bcDisRtcBatt Sets RTC circuit and battery to disconnect after power is turned off.

\* See manual for complete listing

### Solaris

#### SDK Function Reference List

The Solaris SDK uses custom ioctl commands to facilitate easy communication and control of the bc637PCle card. The commands cover basic operational functions, event management, oscillator controls, and mode related functions.

The following list is an overview of the Solaris SDK's ioctl functions.

- Interrupt management
- Read/write dual port RAM. Send command to timing engine for processing
- Read and write time
- Timing mode and time format
- Read and write the card control register
- Input time code format and modulation selection
- Set local time

- Leap seconds control
- Read various version information and miscellaneous data
- Reset the board
- Clock source and jamsync management
- DAC control
- On-board oscillator frequency control
- Advance or retard the internal clock
- Read event time latched by external event
- Read event time latched by software event
- Event source/sense control
- Set propagation delay
- Periodic output and output frequency control
- Strobe control
- DDS frequency output control
- Set output time code format
- Set offset for output time code generation
- GPS control
- Sync Real Time clock
- Disconnect between RTC and battery after power off

## Backward Compatibility Provides Seamless Migration Paths

The PCI-based bc637 cards have long product lifecycles since the first introduction of PCI timing cards in the mid 1990s. To preserve the customer's time and money investments in integrating bc637PCI cards into their systems, Microsemi has maintained the bc637PCI cards' existing features and software interface while adding new features and keeping their bus signaling and form factors up to date. This commitment to backward compatibility and current bus architectures assures the bc637PCI cards integrate smoothly into any workstation currently available in the market with little to no impact on customer application software.

### PCI Card Developments



#### bc637PCI

- Mid-1990s
- First PCI timing card introduced



#### bc637PCI-U

- 2003
- 3.3 V and 5.0 V universal signaling backward compatibility retained



#### bc637PCI-V2

- 2008
- Electronics updated backward compatibility retained



#### bc637PCle

- 2009
- PCIe supported backward compatibility retained

# bc637PCle

GPS Synchronized, PCI Express Time and Frequency Processor

## Optional Accessories Speed, Test, and Simplify Integration


Breakout cables with BNC connectors simplify access to the in and out timing signals of the PCle card. These labeled cables mitigate the need to create special cables during project development and ensure that the correct timing signals are being accessed.

For more integrated rack mount systems that require easy access to timing signals, the 1U patch panel and high frequency signal breakout exposes all available signals. The panel provides an organized and professional appearance to the external timing I/O of the PCle card functions. The 1U panel fits with standard or half rack size chassis. The high frequency breakout adapter exposes the high frequency signal as well as the external DC DAC control signal and ground.

### Input/Output Signals D to BNC Connector Breakout Cables



### 1 U Patch Panel of Input/Output and High Frequency Signals for Standard Rack Mount Size Chassis

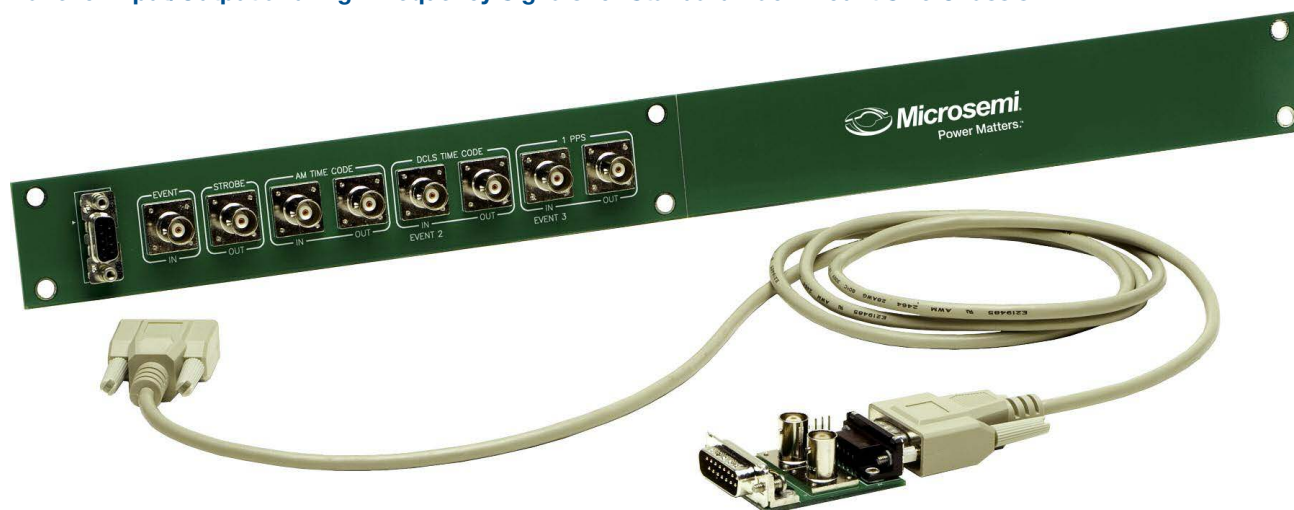

Timing Input/Output Breakout Cable and Patch Panel BNC Map	"D" to 5-BNC (BC11576-1000)	"D" to 5-BNC BC11576-9860115	"D" to 6-BNC	Patch/Breakout
<b>Outputs</b>				
Time code (AM)	•	•	•	•
Time code (DCLS)			•	•
1, 5, or 10MPPS				•
Periodic/DDS				•
Strobe				•
1PPS	•	•	•	•
Oscillator control voltage				•
<b>Inputs</b>				
Time code (AM)	•	•	•	•
Time code (DCLS); event2				•
External event1	•	•	•	•
External 1PPS; event3		•	•	•
External 10 MHz				•

# bc637PCle

## GPS Synchronized, PCI Express Time and Frequency Processor

### Specifications

#### Electrical

• GPS receiver/antenna		• Output amplitude	5 V HCMOS, >2 V high, <0.8 V low into 50 $\Omega$ , square wave
• 12 channel parallel receiver GPS time traceable to UTC(USNO)		• Time compare (Strobe)	
• Accuracy	170 ns RMS, 1 $\mu$ s peak to peak to UTC (USNO), at stable temperature and $\geq 4$ satellites tracked.	• Compare range	1 $\mu$ s through days
• Maximum Belden 9104 cable length	150' (45 m). For longer cable runs see Options.	• Output amplitude	5 V HCMOS, >2 V high, <0.8 V low into 50 $\Omega$ , 1 $\mu$ s pulse
• Real Time Clock		• 1PPS output	5 V HCMOS, >2 V high, <0.8 V low into 50 $\Omega$ , 60 $\mu$ s pulse
• Bus request resolution	100 ns	• 1PPS input, event3	5 V HCMOS, >2 V high, <0.8 V low
• Latency	Zero	• External event input	5 V HCMOS, >2 V high, <0.8 V low, zero latency
• Major time format	Binary or BCD	• External 10 MHz oscillator	Digital 40% to 60% or sine wave, 0.5 $V_{pp}$ to 8 $V_{pp}$ , >10k $\Omega$
• Minor time format	Binary	• Oscillator control voltage	Jumper selectable 0 VDC-5 VDC or 0 VDC-10 VDC
• Synchronization sources	GPS, time code, 1PPS	• On-board disciplined oscillator	
• Time code translator (inputs)		• Frequency	10 MHz
• Time code formats	IRIG A, B, G, E, IEEE 1344, NASA 36, XR3, 2137	• 1, 5, or 10 MHz output	5 V HCMOS, >2 V high, <0.8 V low into 50 $\Omega$
• Time accuracy	<5 $\mu$ S (AM carrier frequencies 1 kHz or greater) <1 $\mu$ S (DCLS)	• Stability	
• AM ratio range	2:1 to 4:1	• Standard TCXO:	5.0 $\times 10^{-8}$ short term "tracking" 5.0 $\times 10^{-7}$ /day long term "flywheeling"
• AM input amplitude	1 $V_{pp}$ to 8 $V_{pp}$	• Optional OCXO:	2.0 $\times 10^{-9}$ short term "tracking" 5.0 $\times 10^{-8}$ /day long term "flywheeling"
• AM input impedance	>5 k $\Omega$	• Real-time clock (RTC)	Battery backed time and year information
• DCLS input, event2	5 V HCMOS >2 V high, <0.8 V low	• PCIe specification:	Single lane PCIe interface, r1.0a compatible
• Time code generator (outputs)		• Size	Standard height low-profile PCIe
• Time code format	IRIG A, B, G, E, IEEE 1344, NASA 36, XR3, 2137	• Power	3.3 V at 400 mA 12 V at 300 mA (TCXO), 400 mA (OCXO)
• AM ratio	3:1 $\pm 10\%$	• Connector	
• AM amplitude	3.5 $\pm 0.5V_{pp}$ into 50 $\Omega$	• GPS Antenna	SMB socket
• DCLS amplitude	5 V HCMOS, >2 V high, <0.8 V low into 50 $\Omega$	• Timing I/O	15-pin 'DS' software
• Timing functions (outputs are rising edge on time)			
• DDS rate synthesizer			
• Frequency range	0.0000001PPS to 100MPPS		
• Output amplitude	5 V HCMOS, >2 V high, <0.8 V low into 50 $\Omega$ , square wave		
• Jitter	<2 nS p-p		
• Legacy pulse rate synthesizer (Heartbeat, aka Periodic)			
• Frequency range	<1 Hz to 250 kHz		



# bc637PCle

## GPS Synchronized, PCI Express Time and Frequency Processor

### Environmental

Temperature	Module	GPS Antenna
Operating	0 °C to 70 °C	–40 °C to 70 °C
Storage	–30 °C to 85 °C	–55 °C to 85 °C

Humidity	Module	GPS Antenna
Operating	5% to 95% non-condensing	100% condensing
Operating altitude	Up to 18,000 m MSL	

- Certifications
  - FCC Part 15, Subpart B.
  - CE Emissions EN 55022
- Immunity EN 55024
- RoHS Compliance
  - EU RoHS 6/6
  - China RoHS
- Complete specifications can be found in the manual located at [www.microsemi.com](http://www.microsemi.com).

### Pin Description

Pin	Direction	Signal
1	Input	External 10 MHz
2		Ground
3	Output	Strobe
4	Output	1PPS
5	Output	Time code (AM)
6	Input	External event1
7	Input	Time code (AM)
8		Ground
9	Output	Oscillator control voltage
10	Input	Time code (DCLS); event2
11	Output	Time code (DCLS)
12		Ground
13	Output	1, 5, or 10MPPS
14	Input	External 1PPS; event3
15	Output	Heartbeat/DDS




### bc637PCle Low-Profile and Standard Cover Panels



### Software

- The bc637PCle software CD includes the SDKs and drivers for the 32/64-bit versions of Windows and Linux, and 64-bit Solaris. Included are test application programs with source code so that you can review the bc637PCle card status and adjust board configuration and output parameters. Each SDK includes an extensive list of function calls to quickly and easily integrate the bc637PCle card into your target environment. For Windows, an additional clock utility program, TrayTime, is provided that can be used to automatically update the host computer's clock.
- The bc637PCle firmware is easily field-upgradeable.

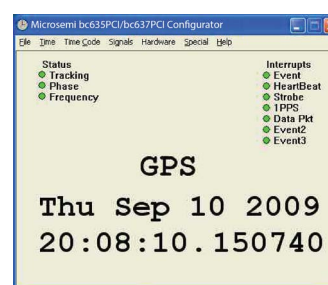

### Product Includes

This product also includes a bc637PCle time and frequency processor board, standard height and low-profile cover plates, one-year warranty, a PCIe user guide CD, and a Windows, Linux, and Solaris SDK/driver software CD.

# bc637PCle

## GPS Synchronized, PCI Express Time and Frequency Processor

### Ordering Information

bc637PCle PCle time and frequency processor, GPS synchronized.

bc637PCle-OCXO PCle time and frequency processor, GPS synchronized, with oven controlled crystal oscillator for extended holdover connector accessories that can be ordered:

- D connector to x5-BNCs adapter (provides TC in, TC out, 1PPS out, event in, periodic out) BC11576-1000
- D connector to x5-BNCs adapter with 1PPS in (provides TC in, TC out, 1PPS in, 1PPS out, event in) BC11576-9860115
- D connector to x6-BNCs adapter (provides TC in, TC out, 1PPS in, 1PPS out, event in, DCLS out) PCI-BNC-CCS
- GPS Inline Lightning Arrestor with 25 ft. (7.5 m) 150-709
- GPS Inline Lightning Arrestor with 50 ft. (15 m) 150-710
- GPS L1 Inline Antenna Amplifier 150-200
- GPS Down/Up Converter with different cable lengths 142-6150

Contact Microsemi for pricing and availability.



**Microsemi Corporate Headquarters**  
One Enterprise, Aliso Viejo, CA 92656 USA  
Within the USA: +1 (800) 713-4113  
Outside the USA: +1 (949) 380-6100  
Fax: +1 (949) 215-4996  
Email: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)  
[www.microsemi.com](http://www.microsemi.com)

©2017 Microsemi Corporation. All rights reserved.  
Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California and has approximately 4,800 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.