

Model 2900AP

Real-time Telemetry Data Processor



IRIG Chapter 4 / 5 / 8 / 9 / 10 CVSD **TMATS**

1 to 8 PCM Stream Processor

**Real-time, OS Independent
Telemetry Processing**

**Card Level, Micro-coded
Software Decommuration**

**Powerful real-time SHARC®
EU & Derived Data Processor**

**Network Extendable via
integrated remote services**

**COTS IRIG Standards - Ch 4
Type I&II, Ch 8, CVSD, TMATS,
CH 10, TMOIP**

**COTS Interfaces - include
IADS, ILLIAD & LabViews**

**Real-time Raw and Processed
Mission Archival Recording**

**NEW 8 Hz to 40 MHz Bit Sync,
Decom/Processor, & Multi-
Stream EU Processor Cards**

**NEW Powerful Programmable
PCM Simulator per Decom**

**NEW Real-time card level
CVSD Voice Processor**

**RF Receivers, Analog, DAC,
Aircraft Data Busses, TMOIP,
Discretes, GPS, and more**



Model 2900AP TDP systems easily accommodate requirements that range from one to many (to 8) Chapter 4 Type I & II PCM decommuration. Each stream supports unique stream attributes, such as rate and format definition, lossless PCM format switching, embedded frame decom, and low-latency derived and concatenated processing using COTS 2900AP hardware and system operator software. Choose from a variety of Acroamatics and 3rd party vendor PCI form factor modules to add receivers, data bus and custom data interface modules.

User friendly Acroamatics Telemetry Software Suite tools enable users to set-up TDP processing modules to process extremely complex PCM formats in real-time via our **Windows OS independent card level embedded "soft-decom" processing methods**. IRIG Chapter 4 (Type I & II), 5, 8, 10 and NASA CCSDS format standards compliant.

ACROAMATICS


TELEMETRY SYSTEMS

Overview

The Acroamatics 2900AP Telemetry Data Processor (TDP) provides ample processing power to meet current and future system real-time mission data display, recording, and networked data services. Each 2900AP TDP is built to comply with PCI bus standards, accepts standard PCI cards of all types, and is configured with your choice of Windows 7 64 bit or XP Pro host operating systems. The Model 2900AP meets requirements ranging from single stream instrumentation lab to multi stream range control room and mission data center telemetry server configurations. System configurations are scalable to accommodate simple to extremely complex low latency PCM decommutation, processing, recording, and networked data services. By combining high-performance Acroamatics telemetry interface and processing cards with select 3rd party PCI modules we have enabled the Model 2900AP TDP to support a wide variety of “turn-key” range and lab telemetry configurations.

System Software

Acroamatics Telemetry Software Suite (ATSS) TDP system software includes GUI applications to set up and operate the range of system hardware configurations available. Operators can store and instantly configure the system using project setup libraries managed by ATSS, or alternatively use convenient Excel or TDP script files to define their own mission TDP configuration management scheme. Using ATSS users can configure and initiate mission support operations from the Mission Console menu, or can control individual TDP functions through specific GUI tools, such as the Data Recording GUI.

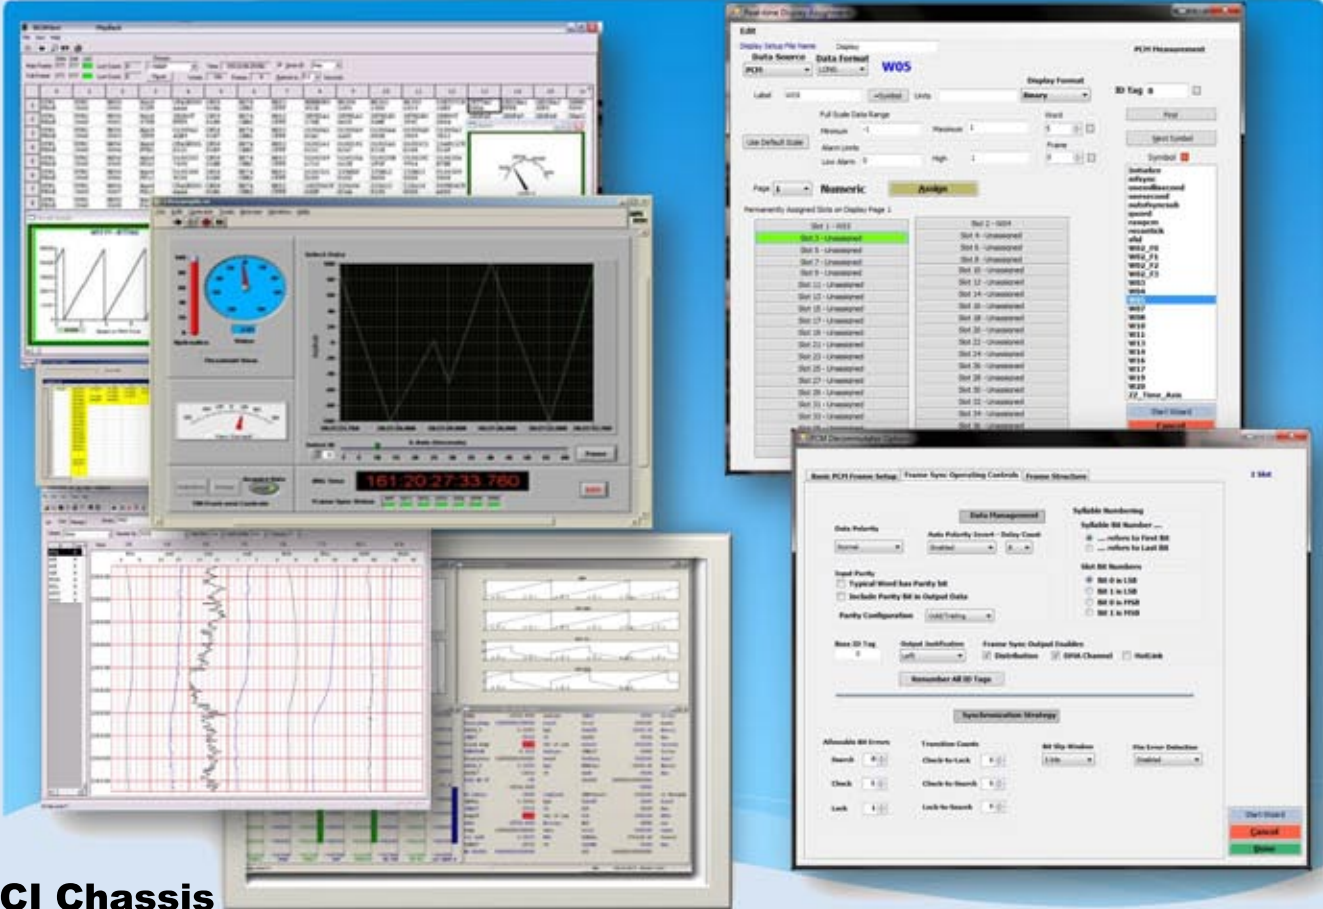

PCI Chassis

The standard Model 2900AP is based on a purpose-designed, rugged industrial 4U RETMA rack-mounted 12-slot PCI chassis configured to specifically meet the demands of rigorous T&E TM groundstation & portable control room applications. Lightweight and shock resistant, the Model 2900AP features lightweight and corrosion resistant all aluminum construction. The Model 2900AP standard features include built-in LED PCM status display panel, rear panel bulkhead mount BNC I/O, dual hot-swappable 500W Power Supplies, rugged internal card cage, and enhanced thermal management. Standard system options include a wide variety of disk storage configurations, and even a high visibility 8” touchscreen LCD front panel display/operator interface. Standard Model 2900AP chassis provides a total of 12 PCI card slots, 2 removable hard drives and a CD/DVD drive. For applications requiring just one or two slots to accommodate data interface requirements, compact (1u & 2u) Single-Stream Telemetry Data Processor chassis or our Model 4022 CTS are alternatives which may be considered and configured to meet your needs. See product data sheets for more information.

Chassis CPU

Standard Model 2900AP chassis are configured with an industrial grade Intel Quad-Core I7 processor based host SBC configured with up to 20GB of RAM and operating under your choice of Windows 7 64-bit or XP Pro operating systems. Custom host processor options include accelerated graphics support, and dual-head displays. 2900AP host processor and interface options are routinely updated to include the latest INTEL processor, networked communications, display and memory capabilities, and system configurations are easily adapted to meet specific customer requirements.

PCI TELEMETRY CARDS



You can select a set of Acroamatics cards to process anything from a single PCM stream to eight streams of complex telemetry data simultaneously in a single TDP chassis - **now including our new generation integrated high performance RF receiver/demod PCI module**. The following brief descriptions of the functions supported by the individual cards is summary in nature only. Please refer to specific module data sheets for complete capabilities descriptions. Please consult us prior to order placement for assistance in configuring a TDP to best suite your requirements.

NEW Model 1612P PCI PCM Data System

The new Model 1612P replaces the Model 1602P. In fact, it's a "Drop-in" replacement. But the 1612 is not just an update, it in fact includes important new functional capabilities and processing power improvements over the 1602P. Like the 1602P, the 1612P is a powerful, self-contained stored program "programmable software decom" card level PCM frame synchronizer and data decommutator, delivering gobs of real-time decommutation and processing power in a true, Windows free real-time processing environment. It handles the most complex conditional, format switched, stream embedded capable, high rate stream decom and output processing requirements in stride. The Model 1612P utilizes user defined micro-coded "soft-decom" processing techniques run within card resident real-time processors to provide six sub-frame decommutators each with dual buffered memories for execution of instructions and data processing algorithms with absolute determinism and timing correlations. We've raised the data rate to 40 Mbps, added a powerful onboard programmable simulator, an 8 channel DAC, and other new capabilities to the 1612P. The 1612P is designed to host our powerful 474DM PCM Bit Synchronizer module and the 470M Time Code Generator/Translator, as needed, allowing the 1612P to deliver better performance for a lower price.

NEW Model 1615P PCI Programmable Data Stream Processor and Data Distribution Module

The Model 1615P is another recently upgraded component of Acroamatics' unique low-latency telemetry processing architecture. The new 1615P allows merging and processing of data from up to eight Model 1612P decom modules, including IRIG time, network fed, HOTLink, PCI, and networked external inputs. The 1615P supports low-latency complex data merging and distribution, outputs multiple data products via dedicated card resident network interfaces, and provides low latency / real-time processing of data using it's powerful on-board SHARC® DSP, embedded processor. A library of over 300 telemetry algorithms is provided, sequential algorithm chaining and derived "if-then-else" processing is supported, as is processing of user-defined expressions. Please see the Model 1615P product data sheet or request supporting technical literature for more details.

NEW Model 1611P PCI 40 MHz Advanced Digital Bit Synchronizer

The 1611P Bit Synchronizer is a state-of-the-art Advanced Digital Bit Synchronizer featuring tunable data rates from 8 Hz to 40 MHz for all codes, supports all IRIG standard and randomized codes, and provides "best-in-class" bit error, jitter, and sync retention performance. Error performance is well below 1 dB of theoretical - typically in the 0.5 to 0.25 db range. Optional features include: Viterbi encoding/decoding, full featured Bit Error Rate Tester & PCM Format Verifier. See 1611P data sheet for details.

NEW Model 470M Time Code Generator/Translator Mezzanine

The Model 470M is a mezzanine card that converts amplitude modulated IRIG time code signals to a digital representation for downstream analysis. Combines time code translation, generation and format simulation on a single plug-on mezzanine module. The card also generates an amplitude modulated serial IRIG A, B, or G output for use by external equipment, and a slow code output for annotating strip charts. The Model 470M mezzanine can be attached to the 1612P card. See the product data sheet for more information.

NEW Model 474DM 40 MHz Bit Synchronizer Mezzanine

The 474DM PCM Bit Synchronizer is a state-of-the-art Bit Synchronizer featuring tunable data rates from 8 Hz to 40 MHz in ALL codes. The card contains selectable input sources, AGC and DC restoration circuitry, and programmable digital filtering for optimum data recovery. Sophisticated PLL (phase-locked loop) circuitry synchronizes a clock to the incoming signal to extract digital data from input PCM stream data. The Model 474DM provides bit sync performance and noise specifications comparable to full size PCI card and the best range chassis based units, using Acroamatics Advanced Digital elements similar to the high performance Model 1611P, but sized to attach to the new Model 1612P, 1622P, and 1626P modules to deliver single slot TM stream processing solutions.

Model 482M D to A Converter Mezzanine (Companion to Model 1615P PDSP)

Model 482M is a mezzanine card for the PCI-bus Model 1615P. Two configurations of Model 482M are available. Model 482M-8 provides a total of 8 channels of 12-bit D-to-A output. Model 482M-32 provides a total of 32 channels of 12-bit D to A output plus 16 channels of 12-bit A-to-D input with a 400 KHz sample rate. See the product data sheet for more information.

NEW Model RDM-205 LL/UL/S/C Band Receiver Module

Now available within the Model 2900 TDP family product line is an exciting new and affordable off-the-shelf PCI card based line of integrated RF Receiver/Demod cards. Evolved from our GDP Space sister division's over two decades of experience in the satellite receiver marketplace, the RDM205 supports Tier 0/II demodulation, delivering the best compact telemetry receiver performance technology available today in a modular, single card PCI format solution.

Model 2900AP Specifications

Physical	4U all-aluminum Rack Mount PCI Chassis (22.5" depth), 34 lbs lbs Avg Weight (Less Cards)
Backplane	14-Slot Passive Backplane (12 PCI, 1 PICMG, 1 ISA)
Processor	Intel Quad Core™
Networking	Dual Ethernet 10/100/1000
USB	6 USB 2.0 (2 front panel & 2 rear panel mounted)
Memory	8.0GB (min) DDR2 SDRAM
Storage	Dual 500GB (min) SATA mounted in 5.25" Rhino (Kingston) Removable Drive System options include single or dual Quad 2TB RAID mounted in 2.5" Removable Drive System
Power	Dual Redundant 500W PS/2 Power Supplies
DVD	Pioneer DVR-K06 Slot Loading Slim DVD-RW
Indicators	LED Status for installed telemetry components Bi-color Power Supply Alarm/Reset status
Signal I/O	80 ea. Rear Panel Flushmount BNC / Twinax / N Type, to customer specifications
Front Panel	Standard configuration includes audio, LED Status Display, HDD Carriers, Power, and CD/DVD/Blueray drive. Options include SATA 3, CVSD audio, SD/PCMCIA card reader 8" high intensity LCD Touchscreen operator interface. Additional customer specified front rear panel options and layouts quoted on request.
Mounting	20" Ball bearing Rack Slides
Cooling	Active cooling, dual 5" fans (CPM 51 spec.)
Environmental	Shock 6G, Non-operating 50G Vibration Operating 0.5G, 5 to 2000 Hz, Non-operating 1.2G, 5 to 500 Hz
Temperature	Operating 0 to +40° C, Non-Operating -40 to +86° C.



SOFTWARE INCLUDED

Acroamatics Telemetry Software Suite (ATSS) software set-up and operating environment is provided installed in each TDP system as the integrated operations hub of your new TDP system. ATSS consists of a closely integrated pre-mission TDP system set-up program (TDPSet), TDP Mission Operator Console (MOC) set-up and desktop operations "environment", and various real-time system editing (e.g. bit sync & decom "tweaking"), control tools (recorder & networking control panel), and various console display editing and system management utilities.

CUSTOM CONFIGURATIONS AND SPECIAL DESIGNS

Acroamatics has the hardware and software expertise necessary to solve even the most complex problems. Our system and card level product capabilities allow us to quickly and effectively design new or modify existing card level modules in response to individual requirements and evolving range and aircraft testing standards. Third party aircraft data buss, receivers, graphics, modules and a wide variety of software application tools are accepted by the Model 2900AP with no special modifications. Acroamatics is an experienced integrator of large multi-vendor systems, with facilities and expertise to assembly, test, and deliver solutions specifically tailored to your needs.

CUSTOMER SERVICE

When you call Acroamatics for support you won't have to work your way through an automated system or an anonymous help desk. You'll be connected directly to the engineers and programmers who designed your system to quickly resolve problems.

WHY ACROAMATICS

Over thirty years of experience, far-ranging expertise, excellent products, and outstanding support make Acroamatics not just a telemetry system supplier, but a partner you can rely on to meet your needs.

Specifications subject to change without notice